



SilTa Ergowall

Silicone covered industrial keyboards for wall mounting



Key Features

- Ergonomic design
- Completely waterproof and dustproof IP65
- fully washable and disinfectable
- almost joint-free surfaces
- good surface resistance
- Comfortable operation, low noise typing
- EMC tested according to standard EN 60601-1-2
- Integrated high resolution touchpad
- Infinitely adjustable torsion hinge
- integrated cable routing in the hinge

Technical specifications

Key technology:	Silicon contact technology (carbon pills on gold contact)
Number of Keys:	105 (incl. 12 F-keys)
Casing:	Milled from AlMg3 surface naturally anodized
Hinge:	Torsion hinge IP65 surface naturally anodized, WS22
Degree of protection:	IP65 (NEMA 4, 4X)
Key travel:	1.25 mm
Actuation force:	1.2 N
Switching reliability:	approx. 2 million actuations
Interface:	USB
Power supply:	Keyboard 20mA @ 5V / touchpad 6mA @ 5V
Operating temperatur:	0 ° C to + 60 ° C
Humidity:	up to 100% non-condensing
Approvals:	CE, FCC Part 15 Class B, EN 60601-1-2

Versions




Silta Ergowall 01, USB, german layout
 Silta Ergowall 01, USB, US / english layout
 Silta Ergowall 02, USB, incl. mouse pad german layout
 Silta Ergowall 02, USB, incl. mouse pad US / english layout

Art.No.: SiltaErgowall-01SDE
 Art.No.: SiltaErgowall-01SUS
 Art.No.: SiltaErgowall-02SDE
 Art.No.: SiltaErgowall-02SUS



Accessories

Mounting set consisting of:
 6x screws M6x16 VA Tx30
 2x Reinforcement plate 2mm VA with edging

Art.No.: SiltaErgowall-BK

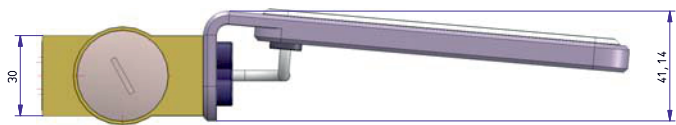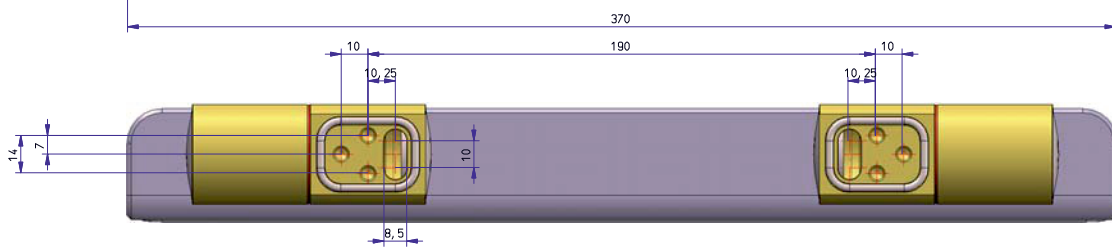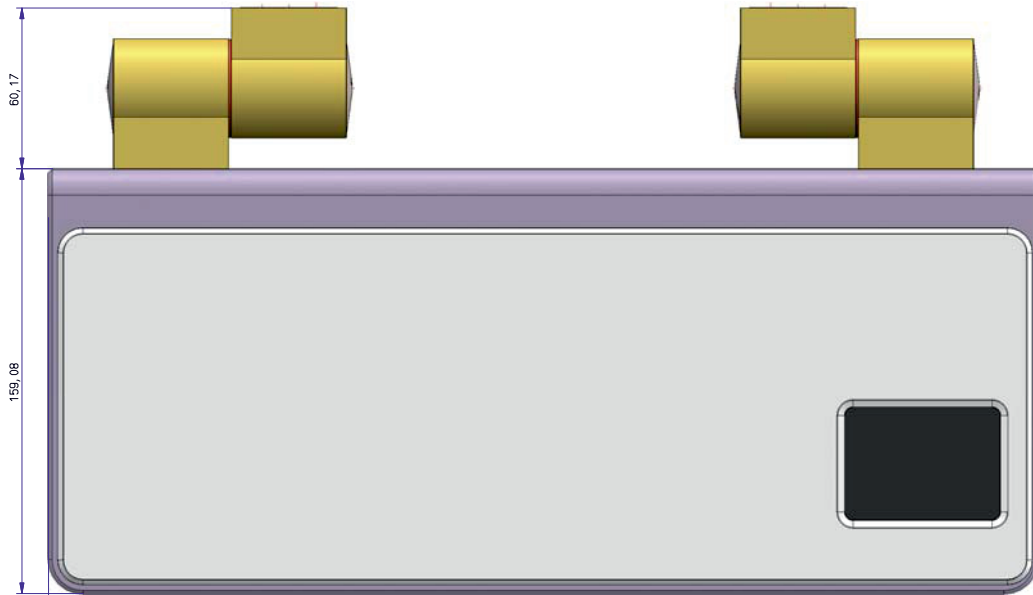

Our information does not release the customer from checking the suitability for the intended area of application.
We reserve the right to make technical changes at any time without prior notice.
Any liability in connection with technical application advice is excluded.
The output of this form is not registered and is therefore not subject to the change service.
Therefore, please always check whether the latest edition is available.

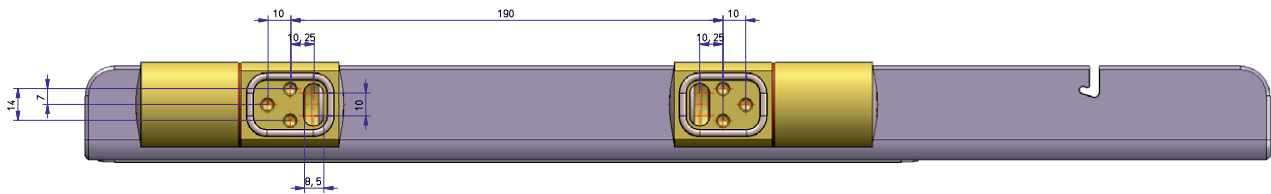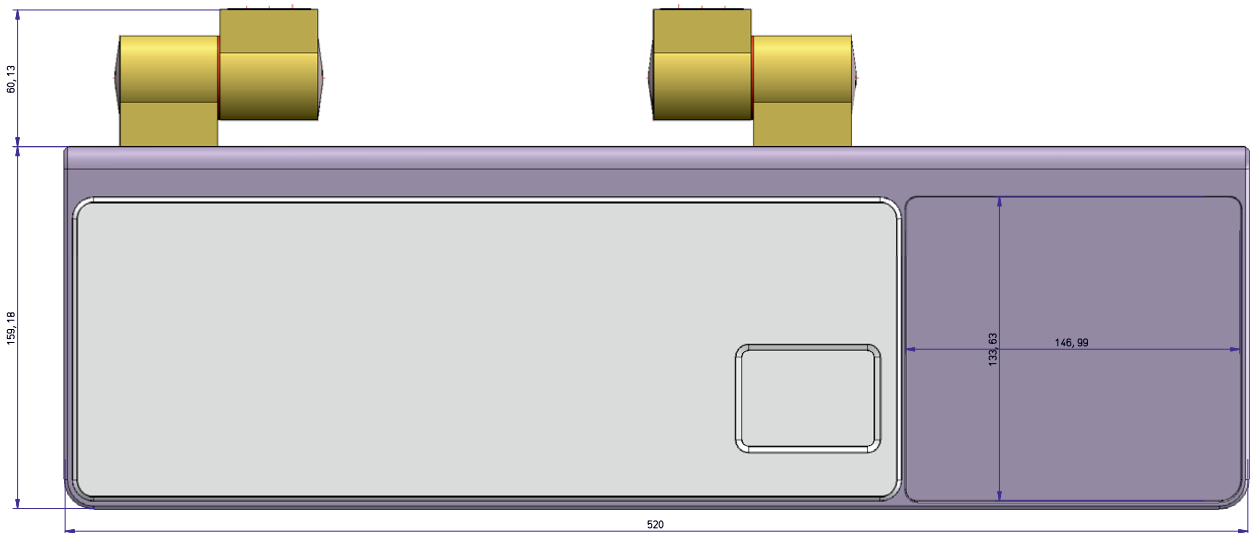

Our information does not release the customer from checking the suitability for the intended area of application.
We reserve the right to make technical changes at any time without prior notice.
Any liability in connection with technical application advice is excluded.
The output of this form is not registered and is therefore not subject to the change service.
Therefore, please always check whether the latest edition is available.